


# Mhouse RC2

Lighting, irrigation and burglar systems controlled by a single remote control

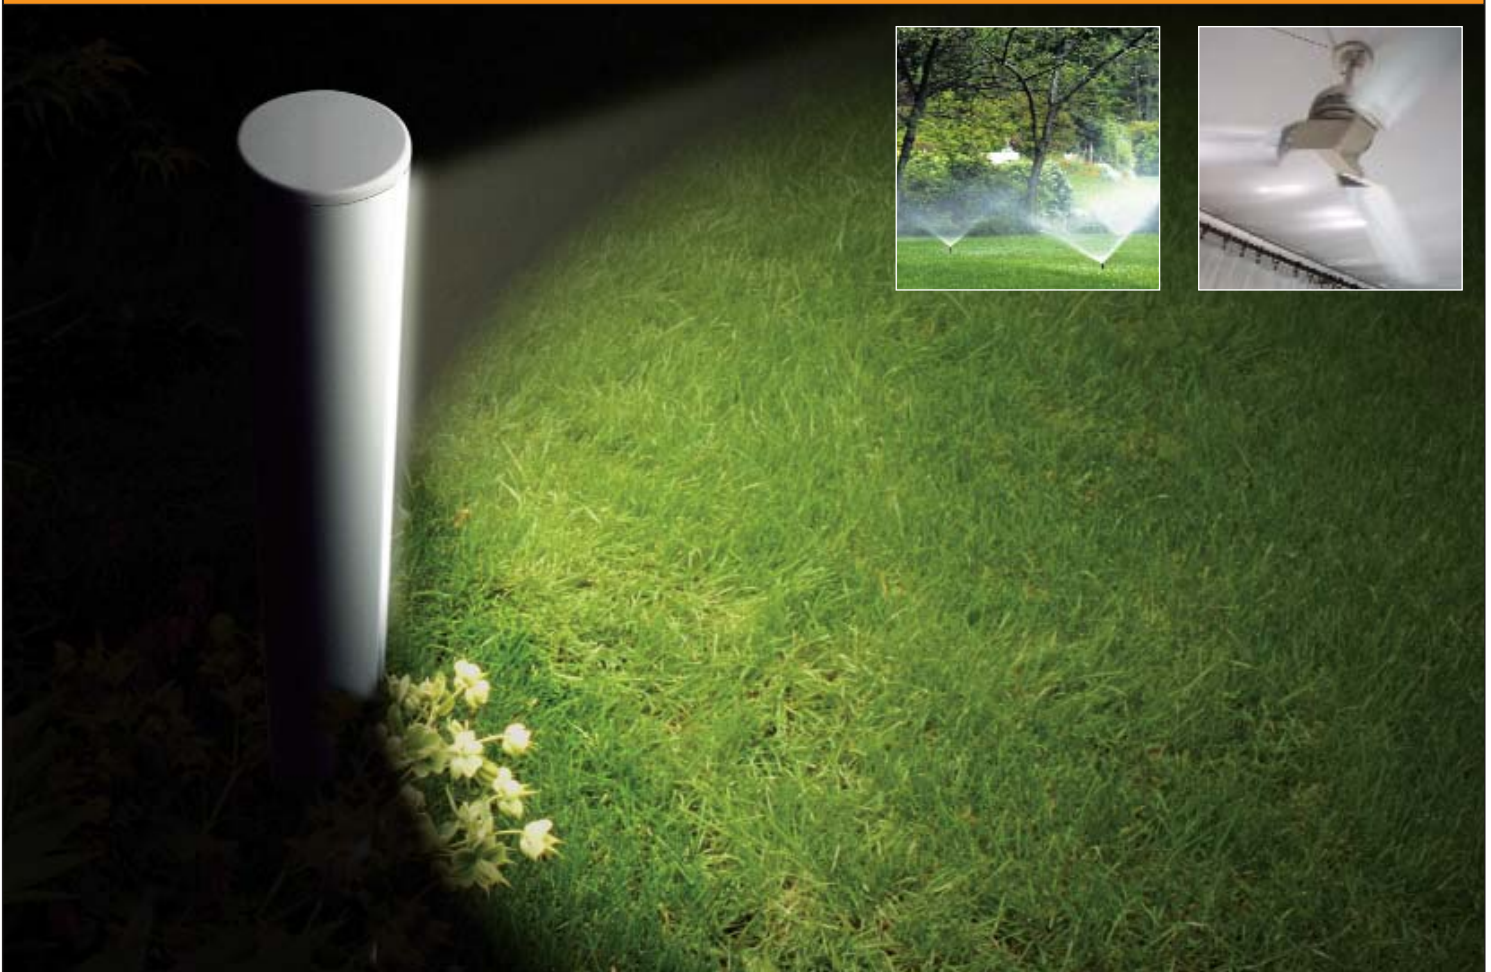

The receiver RC2 allows to control at a distance lighting, irrigation and burglar systems using the same TX4 transmitter used for the gate and garage door automation

**The control unit is suitable to supply loads with 230Vac mains supply and an output of 500W**

**Compact size:**  
only 98x26x20mm

**Protection class:** IP55

**Built-in 433.92MHz radio receiver:**  
with over 18 billion billion combinations and the possibility of memorising up to 30 transmitters

**User-friendly installation**  
and ready for use immediately

#### Technical characteristics of RC2

Power supply (Vac)	230
Power (W)	500
Manoeuvre duration (sec)	TIMER1 TIMER2 from 0,5" to 540'
Programmable functions (Mode 1)	On-Off
Programmable functions (Mode 2)	On - Off - MAN PRESENT Timer 1 - Timer 2
Dimensions (mm)	98x26x20
Weight (gr)	45

#### Internal terminal board for connection

**Automatic switch off:** possibility of programming 2 independent timers from a minimum of 0.5" to a maximum of approximately 9 hours

**Maximum control** versatility with 2 transmitter memorisation modes  
Modo I: ON - OFF with separate buttons  
Modo II: ON - OFF - MAN PRESENT - TIMER

